AZM Transitions Specification Sheet

Product:	Transitions*
Reference picture:	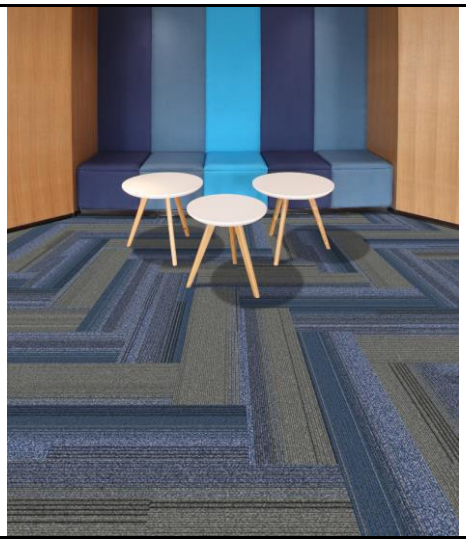
Fiber:	100% Polypropylene
Structure:	Loop pile: Multi-Level loop
Gauge:	1/12”
Stitches:	10 per inch
Tufts/sqm:	186000
Average Pile Height:	4.0+/-0.5mm
Total Height:	6.3+/-0.5mm
Pile Weight:	650g/sqm
Total Weight:	3350g/sqm ±10%
Tile Size:	25*100cm
Backing:	E+Bac (Bitumen)
Approved Installation Method:	 Herringbone Ashlar
Flammability:	ASTM E 645: ≥0.22 watts/cm2 Class II
Smoke Density:	ASTM E 662: ≤450 DMC
Dimensional Stability	AACHEN: ≤0.2 %
Tuft Bind:	ASTM D 1335: ≥8.0 lbs
Delamination:	ASTM D 3936: ≥3.0lbc/in
Static Propensity	AATCC 134: ≤3.5kV
Colorfastness to Light	AATCC 16E: ≥4-5
Colorfastness to Water	AATCC 107: ≥4-5
Colorfastness to Crocking	AATCC 165: ≥4-5

Office - Showroom: T: +90 212 274 44 22 | +90 212 274 42 89 E: info@anilzemin.com | bilgi@anilzemin.com Web: www.anilzemin.com
A: Vadi İstanbul Bulvar 2A Apt, No:3/I , Kat:2 Daire: 15 - 16, Azerbaycan Cd., 34247 Ayazağa/Sarıyer/İstanbul
logistics 1: T: +90 212 229 44 38 | E: info@anilzemin.com | bilgi@anilzemin.com | www.anilzemin.com A: Poligon Mah. Sevim Sok. No:10/B İstinye / Sarıyer / İstanbul
logistics 2: Hellmann Worldwide Logistics