



COLORS.

AFTER HUMAN

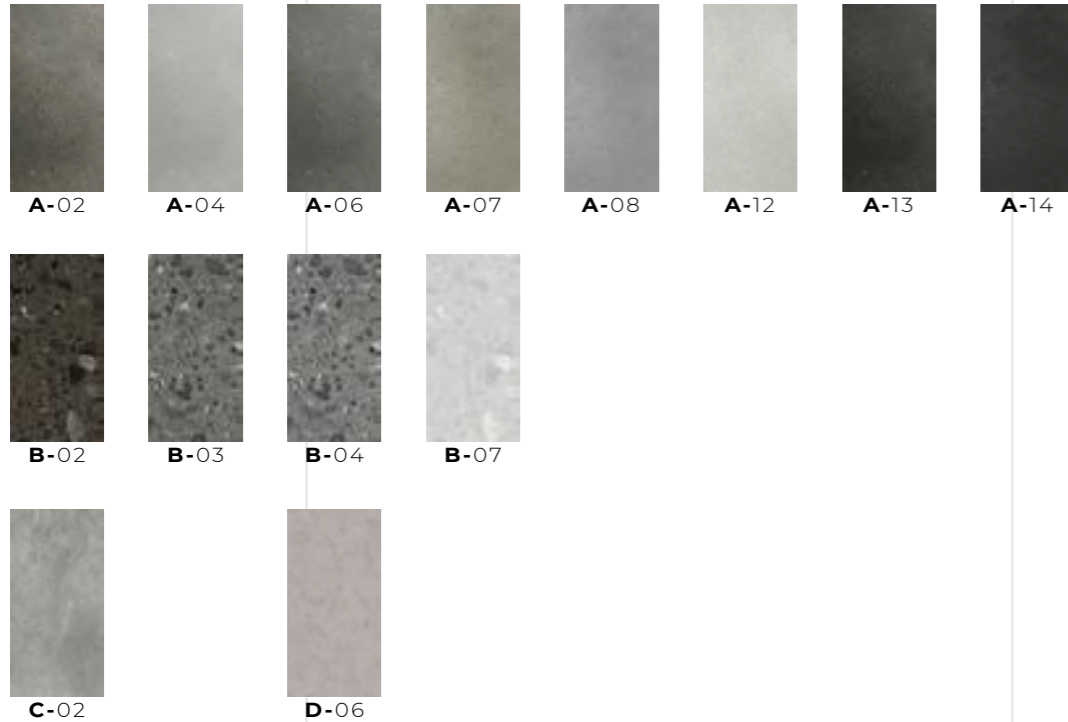

UPON COLORS

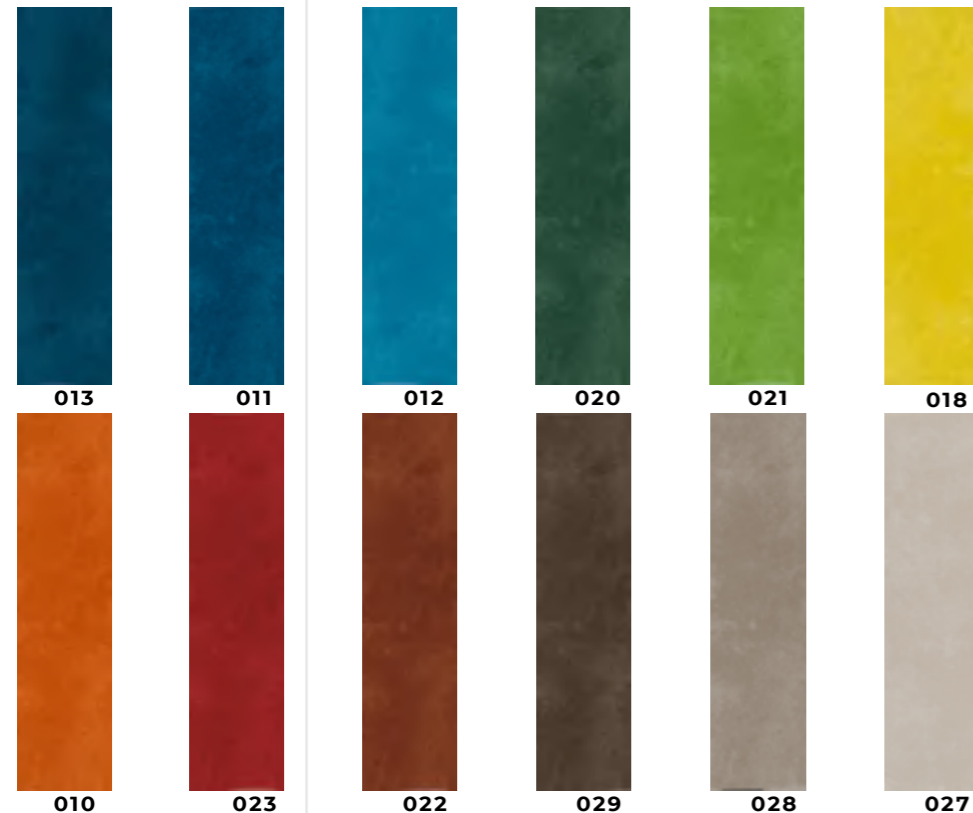

SPECIFICATION.

AFTER HUMAN A,B,C,D



Total Thickness:	5.00 mm
Wear Layer Thickness:	0.50 mm
Wear Layer Treatment:	UV
Tile Size:	45.72cm * 91.44cm
Pieces per Box:	5 pcs/box (2,09m ²)
Fire Rating:	EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0)
Slip Resistance:	EN13893:2002, DS
Performance:	EN ISO 10582: 2012 GB/T 4085-2015
Usage Classification:	43 class - 42 class - 33 class
Warranty:	15 Year Limited Commercial Warranty
Installation Method:	Loose Lay

UPON COLORS

Total Thickness:	5.00 mm
Wear Layer Thickness:	0.50 mm
Wear Layer Treatment:	UV
Tile Size:	25cm * 100cm
Pieces per Box:	8 pcs/box (2m ²)
Fire Rating:	EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0)
Slip Resistance:	EN13893:2002, DS
Performance:	EN ISO 10582: 2012 GB/T 4085-2015
Usage Classification:	43 class - 42 class - 33 class
Warranty:	15 Year Limited Commercial Warranty
Installation Method:	Loose Lay